

# Sage 300 2016

Ops Inquiry and Sales Analysis  
Database Conversion Guide

This is a publication of Sage Software, Inc.

Copyright © 2015. Sage Software, Inc. All rights reserved.

Sage, the Sage logos, and the Sage product and service names mentioned herein are registered trademarks or trademarks of Sage Software, Inc. or its affiliated entities. All other trademarks are the property of their respective owners.

Business Objects® and the Business Objects logo, BusinessObjects®, and Crystal Reports® are trademarks or registered trademarks of Business Objects Software Ltd. in the United States and in other countries. Business Objects is an SAP company.

Microsoft® SQL Server®, Windows Vista® and the Windows logo are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or in other countries.

The names of all other products and services are property of their respective owners.

Your use of this document and the Sage product(s) described herein is governed by the terms and conditions of the Sage End User License Agreement ("EULA") or other agreement that is provided with or included in the Sage product. Nothing in this document supplements, modifies or amends those terms and conditions. Except as expressly stated in those terms and conditions, the information in this document is provided by Sage "AS IS" and Sage disclaims all express, implied or statutory warranties of any kind, including but not limited to the warranties of merchantability, fitness for a particular purpose or of non-infringement. No implied license is granted to you under any Sage intellectual property or trade secret right. Sage reserves the right to revise, supplement or remove information in this document at any time without notice to you or others.

Sage End User License: [www.sage.com/us/legal/eula](http://www.sage.com/us/legal/eula)

Last updated: December 4, 2015

# Table of contents

Introduction	4
System requirements	4
Converting databases to Microsoft SQL Server format	5
Step 1: Activate Ops Inquiry and/or Sales Analysis	5
Step 2: Disable indexes	5
Step 3: Set up access to your Pervasive database	5
Step 4: Copy data from your Pervasive database to your Microsoft SQL Server database	7
Step 5 (optional): Set up a pictures directory in Ops Inquiry	9

Sage 300 now supports only databases in Microsoft SQL Server format. If you are upgrading from a previous version of Sage 300 and you have Ops Inquiry or Sales Analysis databases in Pervasive format, follow the steps in this guide to convert your databases to Microsoft SQL Server format.

**Note:** You must convert your databases before installing your new version of Sage 300.

## System requirements

To complete the steps in this guide, you must have:

- Pervasive PSQL Client or Server
- MS SQL Server 2008 or later
- SQL scripts provided by Sage:
  - ActivateData.sql
  - DisableIndexes.sql
  - EnableIndexes.sql

# Converting databases to Microsoft SQL Server format

Follow the procedures in this section to convert a database from Pervasive format to Microsoft SQL Server format.

**Note:** Some steps in this section assume knowledge of database management tools (such as SQL Server Management Studio and Pervasive Control Center). For detailed information about using these tools, see their documentation.

## Step 1: Activate Ops Inquiry and/or Sales Analysis

1. Open SQL Server Management Studio as a user with sysadmin privileges.
2. Open your company database and then run the DeactivateData.sql script.
3. In Sage 300, open the Data Activation screen in Administrative Services. Activate Ops Inquiry and/or Sales Analysis.

**Note:** The activation process would have created a new database using the following naming pattern: <the SQL database name for the company data>UNI.

For example, if your company database is named SAMLTD and the SQL database name assigned to it is SAMLTD1, the new database would be SAMLTD1UNI.

## Step 2: Disable indexes

In SQL Server Management Studio, open your new database and then run the DisableIndexes.sql script.

## Step 3: Set up access to your Pervasive database

You can set up access to your Pervasive database in either of the following ways:

- Set up a database in Pervasive Control Center.
- Set up a data source using ODBC Data Source Administrator.

**Tip:** You can identify your Ops Inquiry and Sales Analysis database because it is located in a folder named UNI, which is in the folder where your company database is located. For example, if your company database is located in \\Server\Share\SAMLTD, your Ops Inquiry and Sales Analysis database would be located in \\Server\Share\SAMLTD\UNI.

### To set up a database in Pervasive Control Center:

1. In Pervasive Control Center, create a new database.

**Note:** You are not actually creating a new database. Rather, you are creating a profile to access your existing database.

2. On the Create New Database screen, specify the database name and location for your existing UNI Pervasive database.
3. Click **Finish**.

**To set up a data source using ODBC Data Source Administrator:**

1. Open the 32-bit ODBC Data Source Administrator.

**Important!** Do not use the 64-bit ODBC Data Source Administrator.

2. On the System DSN tab, click **Add**.

The Create New Data Source screen appears.

3. On the list of drivers, select **Pervasive ODBC Client Interface**.

**Note:** If **Pervasive ODBC Client Interface** does not appear on the list of drivers, ensure that you have Pervasive PSQL Server or Pervasive PSQL Client installed on the same system as Microsoft SQL Server.

4. Click **Finish**.

The Pervasive 32-bit ODBC Client DSN Setup screen appears.

The screenshot shows the 'Pervasive 32-bit ODBC Client DSN Setup' dialog box. The 'Data Source Name' field contains 'UNI'. The 'Description' field contains 'Pervasive ODBC Client Interface'. Under 'Connection Attributes', the 'Server Name/IP' field contains 'PVSServer' and the 'Transport Hint' dropdown is set to 'Try TCPIP only'. Under 'Data Options', the 'Database Name' radio button is selected, and its dropdown menu contains 'UNI'. There are buttons for 'Create...', 'Get List', and 'Modify...' for both 'Database Name' and 'Engine DSN'. On the right side of the dialog, there are buttons for 'OK', 'Cancel', 'Test', 'Help', and 'Advanced...'.

5. Enter the data source name and server name/IP for your Pervasive database.

6. In the **Transport Hint** field, enter **Try TCPIP only**.

7. In the **Data Options** group, select **Database Name**, and then click **Get List**. On the list that appears, select your Pervasive database.

**Note:** If your Pervasive database does not appear on the list, click **Create** to add it. (You must specify the database name and location for your existing Pervasive database.)

8. Click **OK**.

#### Step 4: Copy data from your Pervasive database to your Microsoft SQL Server database

1. In SQL Server Management Studio, right-click your Microsoft SQL Server database, and then click **Tasks > Import Data**.

The SQL Server Import and Export Wizard appears.


2. Click **Next**.

The Choose a Data Source screen appears.

3. In the **Data source** field, specify **Pervasive PSQL OLE DB Provider**, and then click **Properties**.

The Data Link Properties screen appears.

4. Enter connection information for your Pervasive database, click **Test Connection** to check that the connection is working, and then click **OK**.

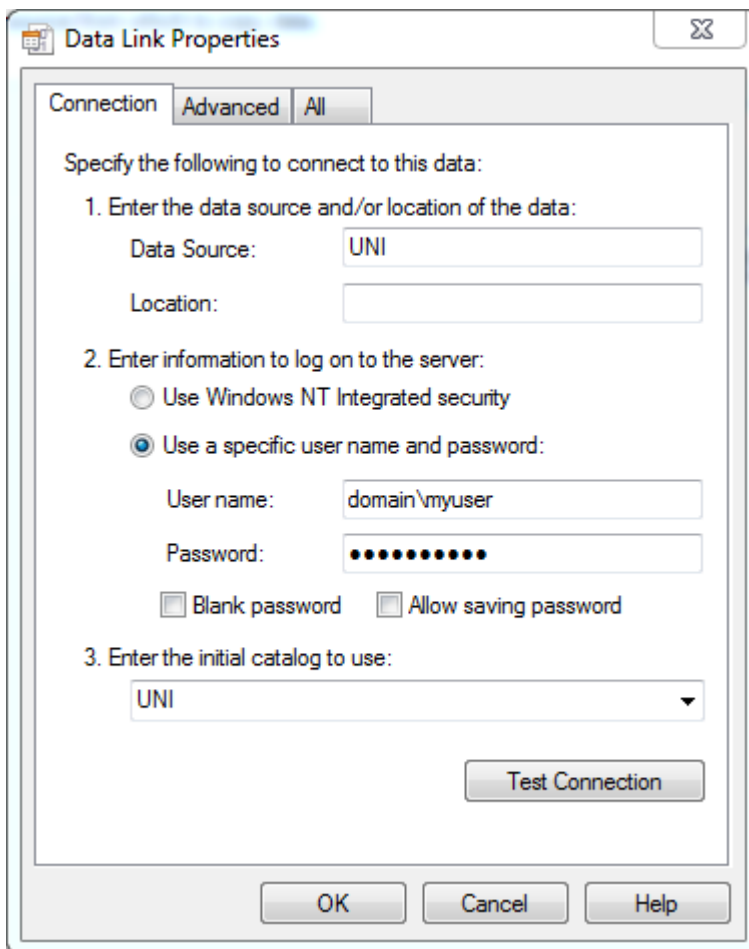

The screenshot shows the 'Data Link Properties' dialog box with the 'Connection' tab selected. The dialog contains the following fields and options:

- 1. Enter the data source and/or location of the data:**
  - Data Source: UNI
  - Location: (empty)
- 2. Enter information to log on to the server:**
  - Use Windows NT Integrated security
  - Use a specific user name and password:
    - User name: domain\myuser
    - Password: (masked with dots)
    - Blank password
    - Allow saving password
- 3. Enter the initial catalog to use:**
  - UNI (selected in dropdown)

Buttons: Test Connection, OK, Cancel, Help.

5. On the Choose a Data Source screen, click **Next**.


The Choose a Destination screen appears.

6. Enter database information for your Microsoft SQL Server database, and then click **Next**.

The Specify Table Copy or Query screen appears.

7. Select the **Copy data from one or more tables or views** option, and then click **Next**.  
The Select Source Tables and Views screen appears.
8. Select and then highlight all Ops Inquiry and Sales Analysis tables (tables beginning with UQ or UX), as follows:
  - a. For each table, check the checkbox.
  - b. While pressing **Ctrl**, click on each selected table so that all selected tables are highlighted.

**Important!** When highlighting tables, make sure you do not click the checkbox, because doing this clears the checkbox.

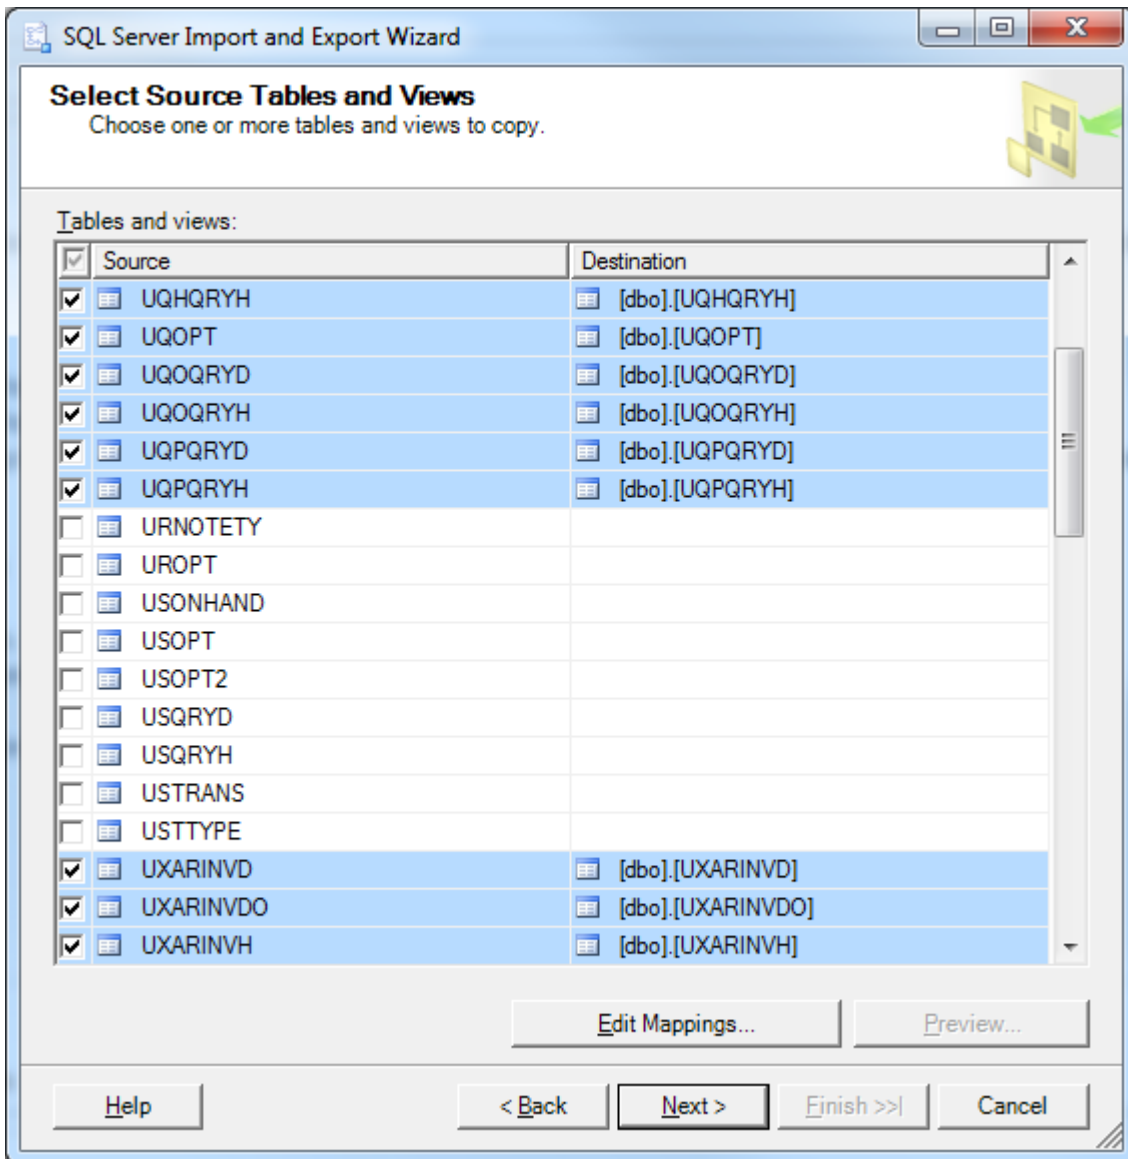

9. Click **Edit Mappings**.  
The Transfer Settings screen appears.
10. Select the **Enable identity insert** option, and then click **OK**.



11. On the Select Source Tables and Views screen, click **Next**.  
The Convert Types Without Conversion Checking screen appears.
12. Confirm that the information on the Convert Types Without Conversion Checking screen is correct, and then click **Next**.  
The Save and Run Package screen appears.
13. Select the **Run immediately** and **Save SSIS Package** options. For the **Save SSIS Package** option, confirm that **SQL Server** is selected, and then click **Next**.  
The Save SSIS Package screen appears.
14. On the Save SSIS Package screen, click **Next**.  
The Complete the Wizard screen appears.
15. Click **Finish**.  
Data from your Pervasive database is copied to your Microsoft SQL Server database.
16. When copying is complete, check that all data was successfully copied, and then click **Close**.
17. On the main SQL Server Management Studio screen, run the EnableIndexes.sql script.  
**Note:** If you copied your data on a test SQL Server environment instead of your production SQL Server environment, you must create a full SQL backup of your new SQL database and then restore from this backup to your production SQL Server environment.
18. In Sage 300, confirm that Ops Inquiry and Sales Analysis screens are visible and working.

### Step 5 (optional): Set up a pictures directory in Ops Inquiry

If you stored pictures in your Pervasive database and you want to continue using those pictures with your new Microsoft SQL Server database, set up a pictures directory in Ops Inquiry, as follows:

1. In Sage 300, open **Ops Inquiry > Setup**.
2. Select the **Store pictures at** option, and then specify the directory where your pictures are stored (for example, C:\Program Files (x86)\Sage\Sage 300 ERP\SAMPLE\SAMLTD).
3. Click **Save**.